

KENWOOD

NEXEDGE®

NX-740H(V)/840H(U)

NEXEDGE® VHF/UHF Digital & FM Mobile Radios

NXDN®

FleetSync®
by KENWOOD

It's true that analog radios are still playing a role in mobile communications. But the future is unquestionably digital, and the new NEXEDGE® NX-740H(V)/840H(U) demonstrates why, offering increased effective coverage area, low noise for superior clarity, and inherent secured voice. As you would expect from KENWOOD, intuitive operation, high-powered performance, and round-the-clock reliability come as standard. But there's more. This mobile radio has a dual personality: it operates in both analog FM and NXDN® digital modes, enabling smooth migration from legacy systems.

● NXDN® DIGITAL AIR INTERFACE

NEXEDGE® radios employ NXDN®, an FDMA digital air interface with AMBE+2™ voice coding technology, unique filtering and a 4-level FSK modulation technique with low bit error rate (BER) even at weak RF signal strengths.

● ENHANCED AUDIO QUALITY

AMBE+2™ VOCODER technology accurately replicates natural human speech nuances for superior voice quality, even at highway speeds. Additionally, the powerful 2-1/4" x 1-3/8" oval speaker delivers up to 4 watt (4Ω impedance) audio output, providing undeniably clearer and crisper audio.

● ULTIMATE PERFORMANCE

Maximum RF output power is 50W on the NX-740H(V) VHF model, 45W on the NX-840H(U) UHF model. Additionally, the UHF frequency coverage on the NX-840(U) is 70MHz.

● HIGH SECURITY

Confidentiality in radio communications is a KENWOOD priority, and helping to maintain a high level of security in analog mode is a 16-code voice inversion scrambler, while robust NXDN® encryption is available in digital mode.

● 32 CHANNELS / 2 ZONES

This radio can be used with two conventional zones, offering up to 16 channels per zone.

● SWITCHABLE DIGITAL AND ANALOG DUAL MODES

The NX-740H(V)/840H(U) is effectively two radios in one – analog and digital – operating on 12.5kHz in analog zones, and on 6.25kHz NXDN® in digital zones.* For convenience, a PF key can be used to switch between zones.

*12.5kHz in digital zones and 25kHz in analog zones are not covered.

● 6.25kHz NXDN® DIGITAL CHANNEL

Digital communications are more spectrum-efficient and offer wider area coverage than analog.

● NXDN® DIGITAL CONVENTIONAL

Compatible with NEXEDGE® Digital Conventional Mode, this radio offers 64 RAN (Radio Access Numbers) and individual & conference group calling to ensure expeditious communications.

● GPS FEATURE


Connecting a GPS Unit to the NX-740H(V)/840H(U) enables you to transmit accurate vehicle location (GPS) data to the central base station for fleet management purpose.

● EXTERNAL D-SUB 15-PIN INTERFACE

The radio's D-Sub 15-pin terminal can be used to connect peripherals, enabling Ignition Sense, External Switch, Horn Alert, etc. Molex interface compatibility is provided by the optional KCT-60 cable.

● OTHER FEATURES

DIGITAL: • Over-The-Air Alias (TX only) • Paging Call • Individual Call & Conference Group Call • Status Messaging • Remote Monitor • Site Roaming • Late Entry • NXDN® ESN
ANALOG: • FleetSync®, MDC-1200, DTMF • QT/DQT/2-tone • Compander • Squelch Level
GENERAL: • Multiple Scan • 4-Color LED (Blue / Red / Green / Orange) • 9 PF Keys • Voice Announcement (select a language from English, Spanish, or Russian) • Emergency Call • Remote Stun/Kill • Lone Worker Alert • Time Out Timer • Busy Channel Lockout • Horn Alert • Ignition Sense • KPG-175D Windows® FPU • Wired Cloning • Password Protection • PTT Release Tone • Minimum Volume • Mic Sense • MIL-STD-810 C/D/E/F/G • IP54 Water & Dust Intrusion

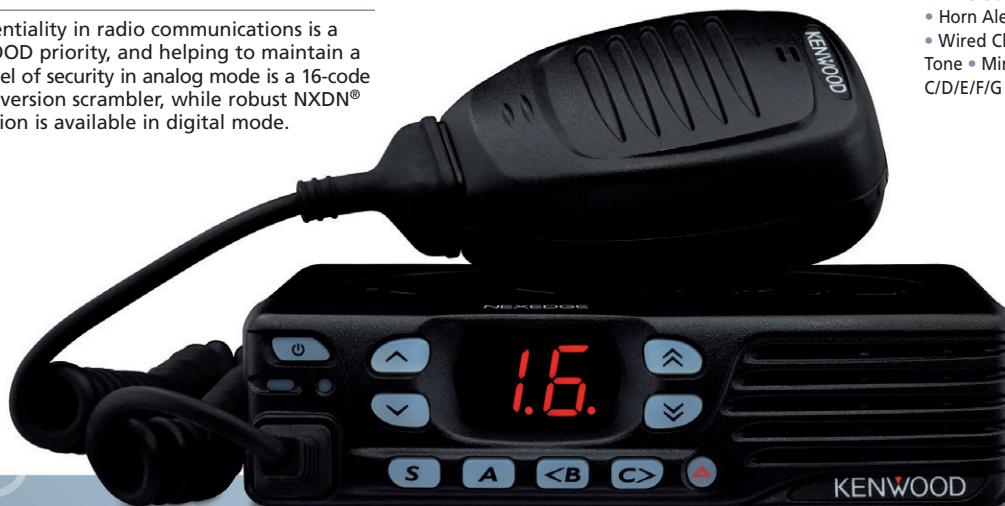

<http://nexedge.kenwood.com>

Options

<p>■ KMC-27A Microphone</p> 	<p>■ KMC-35 Microphone</p> 	<p>■ KCT-18 Ignition Sense Cable</p> 	<p>■ KPS-10A DC Power Supply</p> 
<p>■ KMC-27B Microphone</p> 	<p>■ KMC-36 Keypad Microphone</p> 	<p>■ KCT-36 Extension Cable</p> 	<p>■ KPS-15 DC Power Supply</p> 
<p>■ KMC-28B Keypad Microphone</p> 	<p>■ KMC-9C Base Microphone</p> 	<p>■ KCT-60 Connection Cable</p> 	<p>■ KMB-24 Mounting Case for KPS-15</p> 
<p>■ KMC-30 Microphone</p> 	<p>■ KES-3 External Speaker</p> 	<p>■ KLF-2 Line Filter</p> 	
<p>■ KMC-32 Keypad Microphone</p> 	<p>■ KES-5 External Speaker</p> 	<p>■ KMB-10 Key Lock Adapter</p> 	

All accessories and options may not be available in all markets. Contact an authorized Kenwood dealer for details and complete list of all accessories and options.

Main Specifications

	NX-740H(V)	NX-840H(U)
GENERAL		
Frequency Range	[Type 1] 136-174 MHz	[Type 1] 450-520 MHz [Type 2] 400-470 MHz
Number of Channels	Max. 32	
Number of Zones	2	
Max. Channels per Zone	16	
Channel Spacing	Analog	12.5 kHz
	Digital	6.25 kHz
Operating Voltage	13.6V DC ± 15%	
Operating Temperature Range	-22°F ~ +140°F (-30°C ~ +60°C)	
Frequency Stability	±2.0 ppm	±1.0 ppm
Antenna Impedance	50 Ω	
Dimensions (W x H x D)	Projections Not Included 6.29 x 1.69 x 4.82 in (160 x 43 x 122.6 mm)	
Weight (net)	Radio only 2.42 lbs (1.10 kg)	
FCC ID	[Type1] K44452600	[Type1] K44452700 [Type2] K44452701

	NX-740H(V)	NX-840H(U)
RECEIVER		
Sensitivity	Digital Analog (12 dB SINAD)	0.28 μV 0.28 μV
Selectivity	Analog	65 dB
Intermodulation Distortion	Analog	65 dB
Spurious Response	Analog	75 dB
Audio Output (4Ω impedance)	4W with less than 5 % distortion	
TRANSMITTER		
RF Power Output	5 W – 50 W	5 W – 45 W
Spurious Response	70 dB	
FM Hum & Noise	Analog	40 dB
Audio Distortion	Less than 5%	
Modulation	11K0F3E, 4K00F1E, 4K00F1D, 4K00F7W, 4K00F2D	

Specifications are subject to change without notice, due to advancements in technology. Measurements made per EIA/TIA-603 and Specification are typical. Digital measurements made per CAI measurement procedure.

FleetSync® is a registered trademark of JVCKENWOOD Corporation.

Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

AMBE+2™ is a trademark of Digital Voice Systems Inc.

NXDN® is a registered trademark of JVCKENWOOD Corporation and Icom Inc.

NEXEDGE® is a registered trademark of JVCKENWOOD Corporation.

Applicable MIL-STD & IP

MIL Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures	MIL 810F Methods/Procedures	MIL 810G Methods/Procedures
Low Pressure	500.1/Procedure I	500.2/Procedure I, II	500.3/Procedure I, II	500.4/Procedure I, II	500.5/Procedure I, II
High Temperature	501.1/Procedure I, II	501.2/Procedure I, II	501.3/Procedure I, II	501.4/Procedure I, II	501.5/Procedure I, II
Low Temperature	502.1/Procedure I	502.2/Procedure I, II	502.3/Procedure I, II	502.4/Procedure I, II	502.5/Procedure I, II
Temperature Shock	503.1/Procedure I	503.2/Procedure I	503.3/Procedure I	503.4/Procedure I, II	503.5/Procedure I
Solar Radiation	505.1/Procedure I	505.2/Procedure I	505.3/Procedure I	505.4/Procedure I	505.5/Procedure I
Rain*	506.1/Procedure I, II	506.2/Procedure I, II	506.3/Procedure I, II	506.4/Procedure I, III	506.5/Procedure I, III
Humidity	507.1/Procedure I, II	507.2/Procedure II, III	507.3/Procedure II, III	507.4	507.5/Procedure II
Salt Fog*	509.1/Procedure I	509.2/Procedure I	509.3/Procedure I	509.4	509.5
Dust*	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I	510.4/Procedure I, III	510.5/Procedure I
Vibration	514.2/Procedure VIII, X	514.3/Procedure I	514.4/Procedure I	514.5/Procedure I	514.6/Procedure I cat. 20
Shock	516.2/Procedure I, II, III, V	516.3/Procedure I, IV, V	516.4/Procedure I, IV, V	516.5/Procedure I, IV, V	516.6/Procedure I, IV, V
International Protection Standard					
Dust & Water Protection	IP54*				

*Required conditions: Microphone (KMC-35 or KMC-36) is connected; Cap shall be installed on the speaker connector; Cover shall be installed at D-sub connector (15pin); and KCT cable and/or SP cable are not connected.

ACCESSORIES INCLUDED

- KMC-35 Microphone (for the NX-740HV/840HU)
- KMC-30 Microphone (for the NX-740H/840H)
- DC Cable
- Fuse
- Set of screws
- Mic. Hanger
- Bracket

Kenwood U.S.A. Corporation
Communications Sector Headquarters
3970 Johns Creek Court, Suite 100, Suwanee, GA 30024-1265

Order Administration/Distribution
P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745

Kenwood Electronics Canada Inc.
Canadian Headquarters and Distribution
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8
www.kenwood.ca



ISO9001 Registered

CL787K-E-2